ELECTRIC PASTA COOKER 1 BOWL 40 L



CODICE CR0991029 MODELLO
D93/10CPE

DIAMANTE 90

SERIE



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Moulded tubs with rounded corners, made of AISI 316 stainless steel for maximum corrosion resistance. ■ Water filling available by means of solenoid valve with the possibility of fast or slow loading or by means of a mechanical tap located on the control panel Stainless steel water outlet integrated in the expansion zone, and floor drain. ■ Safety pressure switch to prevent activation of heating without water in the tank. ■ Gas version: Heating via stainless steel burner positioned outside the tank. ■ Safety gas valve with thermocouple and electric ignition. ■ Electric version: Heating by means of an AISI 304 steel

armoured heating element located in the tank and rotatable by 90° for easy cleaning.

■ Safety pressure switch to prevent activation of heating without water in the tank. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.







CODICE CR0991029 MODELLO D93/10CPE SERIE
DIAMANTE 90

Technical Information

SPECIFICATION	DATA	
MATERIAL	CR0991029	
DEFINITION	D93/10 CPE CUOCIPASTA EL. M60 1V.42LT	
COMMERCIAL LINE	DIAMANTE	
SUPPLY	ELECTRICS	
DIM. WIDTH	600 mm	
DIM. PRODUCTIVITY	900 mm	
DIM. HEIGHT	870 mm	
NETWEIGHT	56 Kg	
VOLUME (net)	0,470	
PACKAGE LENGTH	640 mm	
PACKAGE WIDTH	1060 mm	
PACKAGING HEIGHT	1230 mm	
PACKAGE VOLUME	0,836 m3	
GROSS PACKING WEIGHT	68 Kg	
STANDARD POWER SUPPLY	380-415V 3N	
FREQUENCY	50-60 Hz	
ELECTRICAL POWER	9,000 kW	
IP GRADE	IPX5	
CERTIFIED MODEL	D93/10 CPE	








CODICE CR0991029 MODELLO
D93/10CPE

DIAMANTE 90

SERIE

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

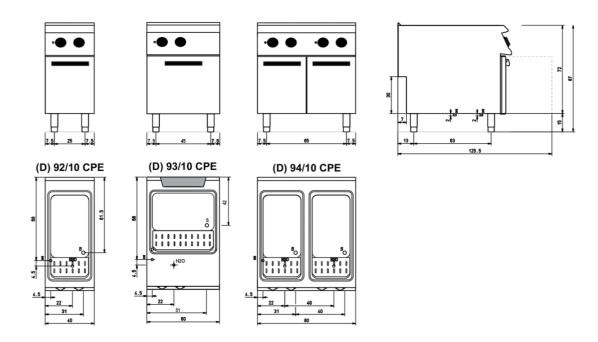

Legenda - Legende - Key - Légende - Leyenda - Legenda

H2O Attacco arrivo acqua - Wasseranschluss - Water inlet Arrivée eau - Union de agua - Wateraansluiting EN ISO 228-1 G 3/4

- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- S Attacco scarico acqua Wasserablauf Water outlet Vidange de l'eau - Desaguadero - Wateraftapaansluiting EN 10226-1 R 1






ELECTRIC PASTA COOKER 1 BOWL 40 L



CODICE MODELLO
CR0991029 D93/10CPE

D93/10CPE DIAMANTE 90

SERIE



Safety pressure switch to prevent activation of heating without water in the tank.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.





ELECTRIC PASTA COOKER 1 BOWL 40 L



CODICE CR0991029 MODELLO D93/10CPE

DIAMANTE 90

SERIE

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1356219	CCP13F60	Basket 16x28x18 cm GN1/3 FOR D93/10 CP.
CR0789950	96KIT-A(93)	Bath Basket Kit 96KIT-A (93)
CR0789960	96KIT-B(93)	Bath Basket Kit 96KIT-B (93)
CR0592789	ZF6	Front plinth - FOR INSTALLING EQUIPMENT WITH FLOOR HEIGHT 90 CM L=60
CR0592830	ZG	SKIRTING JOINT
CR0592820	9ZL	Side plinth
MA97432000	R	WHEEL KIT (2 + 2) Ø 100
MA97433000	RI	WHEEL KIT (2 + 2) Ø 101 STAINLESS STEEL
CR0592869	PZM	NO. 4 STAINLESS STEEL FEET FOR INSTALLATION ON CONCRETE PLINTH
CR0593580	9PT	No. 4 stainless steel feet for installation on tops
CR0592879	KPA	N.2 STAINLESS STEEL FEET WITH FLANGE

